

Experimental Investigation on the Effect of Gas While Machining of EN9 Material

Gurbir Singh¹, Chandan Gupta² & Pankaj Sharma³

Student in Sri Sai College of Engineering and Technology, Department of Mechanical Engineering, India.

Article Received: 30 August 2018

Article Accepted: 25 December 2018

Article Published: 28 February 2019

ABSTRACT

It was found that conventional cooling techniques, which include flood coolant techniques, tend to be detrimental to tool life. This is due to the inability for the coolant to reach the cutting edge at such high cutting speeds. Moreover, conventional cutting fluids cause environmental and health problems. The disposal of them becomes important environmental and economic issues to be considered by machining industry, because the disposal cost is very expensive. Therefore, new methods of cooling, such as minimum quantity lubrication, solid lubricants and cryogenic cooling have now been used in extending tool life. Another very recent newcomer in the search for extending tool life is the cryogenic treatment of cutting tools. Cryogenic technology on the whole is not a new process, and has been used on several types of materials including plastics and composites to improve their performance in their various applications. The cryogenic treatment improves the properties of the tool material. In the present experimental investigation, study the machining performance of cryogenic carbide as a tool and EN 9 material as work piece using environment of Nitrogen. The experimental results reveal that using cryogenic technology has effects on Cutting forces and Tool wear.

Keywords: Nitrogen gas, cryogenic carbide tool, tool wear, cutting forces.

1. INTRODUCTION

THE CRYOGENIC TREATMENT IMPROVES THE PROPERTIES OF THE TOOL MATERIAL. THE CRYOGENIC TREATMENT IMPROVES TOOL WEAR RESISTANCE, SURFACE FINISH OF WORK PIECE MATERIAL AND REDUCES CUTTING FORCES. THE IMPROVEMENT IN TOOL WEAR RESISTANCE MAY BE DUE TO PRECIPITATION AND DISTRIBUTIONS OF THE H-PHASE PARTICLES AFTER CRYOGENIC TREATMENT. THE CRYOGENICALLY TREATED TOOLS PERFORM BETTER WHILE PERFORMING INTERMITTENT CUTTING OPERATIONS. GENERALLY, LONGER MACHINING TIMES DIMINISH ANY BENEFICIAL EFFECT OF TOOL LIFE THAT CRYOGENIC TREATMENT BRINGS ABOUT. CRYOGENICALLY TREATED TOOLS PERFORM BETTER WHEN THE TOOL TEMPERATURE IS KEPT LOW. THEIR EFFECTIVENESS CAN BE EXTENDED IF COOLANTS OR SUITABLE METHODS OF COOLING ARE USED TO KEEP THE TOOL TEMPERATURES LOW. TRADITIONALLY, HIGH TEMPERATURE IN CUTTING ZONE HAS BEEN CONTROLLED BY USING CUTTING FLUIDS. BUT, CONVENTIONAL CUTTING FLUIDS CAUSE ENVIRONMENTAL POLLUTION, HEALTH PROBLEMS AND HIGH DISPOSAL COSTS. REGULATIONS HAVE BEEN FORCING MANUFACTURERS TO REDUCE OR ELIMINATE THE AMOUNT OF WASTES. AS TECHNOLOGY IMPROVES AND CUTTING SPEEDS IN MACHINING ARE INCREASED, IT WAS FOUND THAT CONVENTIONAL COOLING TECHNIQUES, WHICH INCLUDE FLOOD COOLANT TECHNIQUES, TEND TO BE DETRIMENTAL TO TOOL LIFE. THIS IS DUE TO THERMAL SHOCKS, AS WELL AS THE INABILITY FOR THE COOLANT TO REACH THE CUTTING EDGE AT SUCH HIGH CUTTING SPEEDS.

THE REVIEW OF LITERATURE ALSO INDICATED THAT APPLICATION OF GASES AS A CUTTING FLUID REDUCES THE CUTTING ZONE TEMPERATURE VERY EFFECTIVELY. GASES ARE POLLUTION-FREE, ECO-FRIENDLY AND ARE GOOD COOLANT AND LUBRICANT. THE APPLICATION OF GASES PRODUCED LOWER CUTTING FORCE, IMPROVES THE ROUGHNESS OF THE FINISHED SURFACE, AND REDUCES THE TOOL WEAR. THESE EFFECTS CAUSED THE LOWEST CUTTING FORCE IN CARBON DIOXIDE GAS APPLICATION AS COMPARED TO OTHER GASES. THE NITROGEN GAS SUITABLY DECREASED THE CUTTING TEMPERATURE, AND IMPROVED THE CONTACT CONDITIONS AT CHIP-TOOL INTERFACES. NITROGEN GAS FORMED A FILM ON TOOL SURFACE, CHIP EASILY MOVED AWAY FROM TOOL FACE AND

LOWER FRICTION OCCURRED IN TOOL-WORK PIECE-CHIP INTERFACE. THE CUTTING FORCE AND TOOL WEAR WERE REDUCED AND ROUGHNESS OF THE FINISHED SURFACE WAS IMPROVED. NITROGEN GAS ALSO HELPED IN TIGHTER CHIP CURL AND SHORTER CONTACT LENGTHS COMPARED TO THE AMBIENT TEMPERATURE ENVIRONMENTS. IT IS INVESTIGATED THE EFFECT OF CRYOGENIC TREATMENT ON THE MECHANICAL AND MAGNETIC PROPERTIES OF WC-8WT. % CO CEMENTED CARBIDES AND SHOWED THAT CRYOGENIC TREATMENT ENHANCES HARDNESS, COMPRESSION STRENGTH, WEAR RESISTANCE AND FATIGUE RESISTANCE, WHILE THE BENDING STRENGTH AND TOUGHNESS ARE NOT CHANGED. THE CHANGE OF THE MECHANICAL PROPERTIES HIGHLY DEPENDS ON THE SOAKING TIME. THE CRYOGENIC TREATMENT IMPROVES TOOL WEAR RESISTANCE, SURFACE FINISH OF WORK PIECE MATERIAL AND REDUCES CUTTING FORCES [1]. DEEP CRYOGENIC TREATMENT HAS VARIOUS ADVANTAGES LIKE INCREASE IN WEAR RESISTANCE, REDUCED RESIDUAL STRESSES; INCREASE IN HARDNESS, FATIGUE RESISTANCE, TOUGHNESS IMPARTED BY TRANSFORMATION OF RETAINED AUSTENITE TO MARTENSITE, PRECIPITATION OF CARBIDES, ETA-CARBIDE FORMATION, PERFECT DISTRIBUTED/HOMOGENOUS CRYSTAL STRUCTURE, BETTER THERMAL CONDUCTIVITY, AND REDUCED CHEMICAL DEGRADATION. THIS TECHNOLOGY IS AN ECO-FRIENDLY, NONTOXIC, AND NON EXPLOSIVE [2]. IN THIS WORK AIMS TO STUDY THE PERFORMANCE OF THE CRYOGENIC TREATMENT ON THE CARBIDE TOOLS (SHALLOW CRYOGENIC TREATED AND DEEP CRYOGENIC TREATED) COMPARED TO THE UNTREATED TOOL FOR MACHINING THE AISI 1020 BRIGHT ROD (WORK PIECE). FROM THAT MACHINING, THE TOOL WEAR AND SURFACE ROUGHNESS VALUES OF THE WORK PIECE MATERIAL WAS DETERMINED. AT THE SAME TIME CUTTING ZONE TEMPERATURE AND CHIP FORMATION METHODOLOGY WERE OBSERVED. FROM THE TOOL WEAR TESTS DEEP CRYOGENICALLY TREATED TOOL REVEALED THE LESS AMOUNT OF WEIGHT LOSS (10MG). THE REASON BEHIND THAT, THE FORMATION OF η PHASE PARTICLES PRECIPITATED ON THE CARBIDE INSERTS AFTER THE CRYOGENIC TREATMENT. THE SEM IMAGES AND EDX IMAGES SHOWS THE FORMATION OF FINE GRAINS[3]. THE TOOL LIFE OF DEEP CRYOGENIC TREATED COATED CEMENTED TUNGSTEN CARBIDE CUTTING TOOL INSERTS WAS LARGER BY A FACTOR OF 1.27 (27% INCREASE) WHEN COMPARED TO UNTREATED INSERTS[4]. THE MAIN CUTTING FORCES FOR THE DEEP CRYOGENIC TREATED INSERTS WERE LESSER BY 11% WHEN COMPARED TO UNTREATED INSERTS FOR CUTTING SPEEDS IN THE RANGE BETWEEN 200 AND 350M/MIN.

2. PROBLEM FORMULATION

The review of literature clearly indicated the new cutting tool materials like high-performance ceramics, cubic boron nitride, coated carbides, cryogenically carbide have been greatly improved machining of several engineering materials, even in some case of difficult-to-cut metals. The rising of temperature during cutting processes negatively affects tool life. It also adversely changes machine parts quality, such as dimensional accuracy and surface quality. High temperature in cutting zone has been traditionally tried to control by using cutting fluids. The coolant effect reduces temperature in cutting zone and the lubrication action decreases cutting forces. Thus the friction coefficient between tool and chip becomes lower in comparison to dry machining. However, as technology improves and cutting speeds in machining are increased, it was found that conventional cooling techniques, which include flood coolant techniques, tend to be detrimental to tool life. This is due to the inability for the coolant to reach the cutting edge at such high cutting speeds. Therefore, new methods of cooling, such as minimum quantity

lubrication, solid lubricants and cryogenic cooling have now been used in extending tool life. The cryogenic treatment improves the properties of the tool material. The cryogenic treatment improves tool wear resistance, surface finish of work piece material and reduces cutting forces. The improvement in tool wear resistance may be due to precipitation and distributions of the η -phase particles after cryogenic treatment. The cryogenically treated tools perform better while performing intermittent cutting operations.

The review of literature indicated that cryogenic treatment has been acknowledged as a means of extending the life of carbide insert but no study has been reported in open literature regarding the effect of gases as a coolant on the performance of cryogenically treated carbide insert in turning. So, the present work is based on some experimental investigation on the effect of nitrogen gas on the performance of cryogenically treated carbide in turning. The experiments were performed at different input parameters i.e. cutting speed, feed and depth of cut and compared with dry machining. The effect of these parameters on cutting forces and tool wear were evaluated as per Taguchi design.

3. EXPERIMENTAL SETUP

In the experimental investigation, we used EN 9 material as the work piece material and carbide as the tool material. In Experimental investigation, Dry and Nitrogen gas are used as varying parameters to evaluate the machining performance



Figure No: 1 Photographic view of the experimental set up

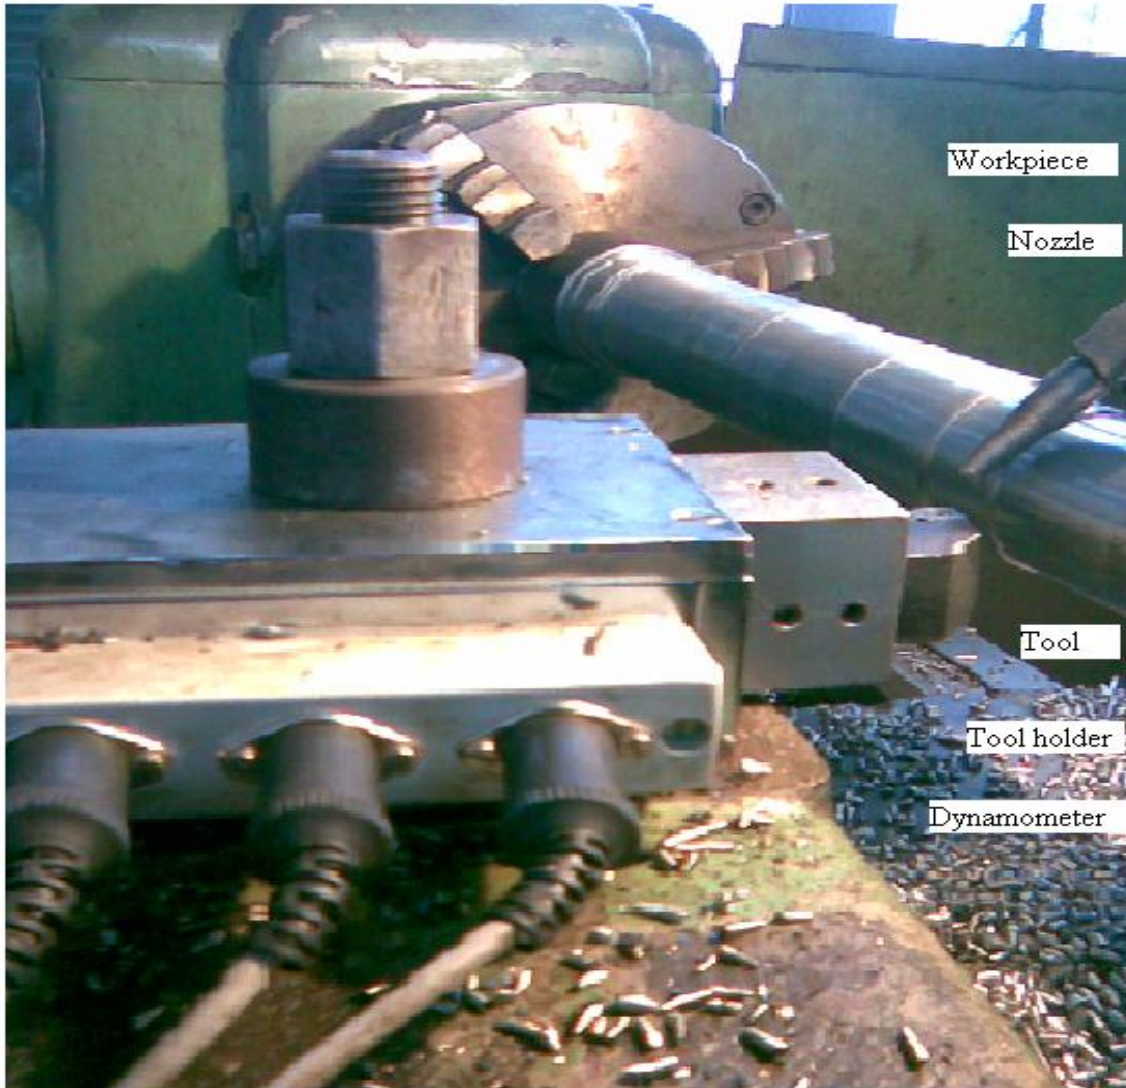


Figure NO: 2

The photographic view of the experimental set up is shown in Fig. 1. For this experimentation a high power rigid lathe of HMT (LB-17 model) was used.

3.1. Dynamometer

The cutting force was measured by using a dynamometer for each machining condition. The photographic view of the dynamometer is shown in Figure.

3.2. Metallurgical Microscope

The flank wear was measured using metallurgical microscope (YUCON Japan). The photographic view of metallurgical microscope is shown in the figure



Figure No: 3

4. WORK PIECE AND TOOL USED

A material used in this experimental investigation is EN 9. Tool used in this experiment is carbide. Carbide material consists of atoms of nitrogen and boron, was produced in the early 1970s by high pressure, high temperature processing. It has high hardness and high thermal conductivity. It has much higher tensile strength as compared to diamond. It is chemically inert so it can be used as a substitute for diamond for machining steel.

5. GASES USED

The Nitrogen gas is used in this investigation. Nitrogen gas is used to compare its effectiveness with dry environment.

6. SET-UP AND EXPERIMENTAL PROCEDURE

To fulfill the objectives of present work, experiments were performed on EN 9 steel by cryogenically carbide under both dry and gaseous cooling environments. For this experimentation a high power rigid lathe of HMT (LB-17 model) was used. The cutting tools were purchased from Mitsubishi, India. The carbide cutting tools were treated cryogenically. Carbide cutting tool inserts are available in many different tool geometries and material grades.

For cooling and lubrication, nitrogen gas was used. These gases were impinged from a mild steel nozzle having diameter 1.40mm. The pressure of nitrogen and carbon dioxide gases has been kept at 3 bars. The material selected for the experiment was EN 9 steel having diameter 75mm and length 730mm.

The response parameters analyzed were cutting force and tool wear. The cutting force was measured by using a dynamometer for each machining condition. The tool was attached on dynamometer and static calibration of the system was completed before experiment. The flank wear was measured using metallurgical microscope (YUCON Japan). The effect of input parameters on cutting force and tool wear were evaluated as per Taguchi design, using L27 orthogonal array.

Table1. Input machining parameter

S. No.	Factor	Level-1	Level-2
1	A: Cutting speed (m/min)	28	49
2	B: Feed (mm/rev)	0.050	0.063
3	C: Depth of cut (mm)	0.5	1
4	D: Environment (Catagorial factor)	Dry	Nitrogen gas

Table2. Experimental observations

Exp. No.	A: Cutting Speed (m/min)	B: Feed (mm/rev)	C: Depth of Cut (mm)	D: Environment	Response-1 Cutting forces (kgf)	Response-2 Tool wear (mm)m((m)
1	28	0.05	0.5	Dry	32.7	0.319
2	28	0.05	1	N2	38.7	0.327
3	28	0.063	0.5	N2	26.8	0.346
4	28	0.063	1.5	Dry	46.7	0.357
5	28	0.075	1	Dry	45.2	0.354
6	28	0.075	1.5	N2	47.3	0.388
7	49	0.05	0.5	N2	26.9	0.361
8	49	0.05	1.5	Dry	36.5	0.399
9	49	0.063	1	Dry	35.2	0.402
10	49	0.063	1.5	N2	45	0.376
11	49	0.075	0.5	Dry	32.5	0.361

12	49	0.075	1	N2	35.8	0.37
13	63	0.05	1	Dry	28.2	0.398
14	63	0.05	1.5	N2	33.5	0.411
15	63	0.063	0.5	Dry	30.7	0.356
16	63	0.063	1	N2	29.2	0.36
17	63	0.075	0.5	N2	25.1	0.378
18	63	0.075	1.5	Dry	38.5	0.453

7. RESULTS & DISCUSSION

7.1 Effect of cutting forces

The cutting force found decreased with the increase in speed. This was due to decrease in the co-efficient of friction at the tool-chip interface on the rake face and an increase in shear angle. In case of gases application, the lowest cutting force was achieved by using carbon dioxide gas as a cutting fluid as compared to nitrogen gas and dry turning.

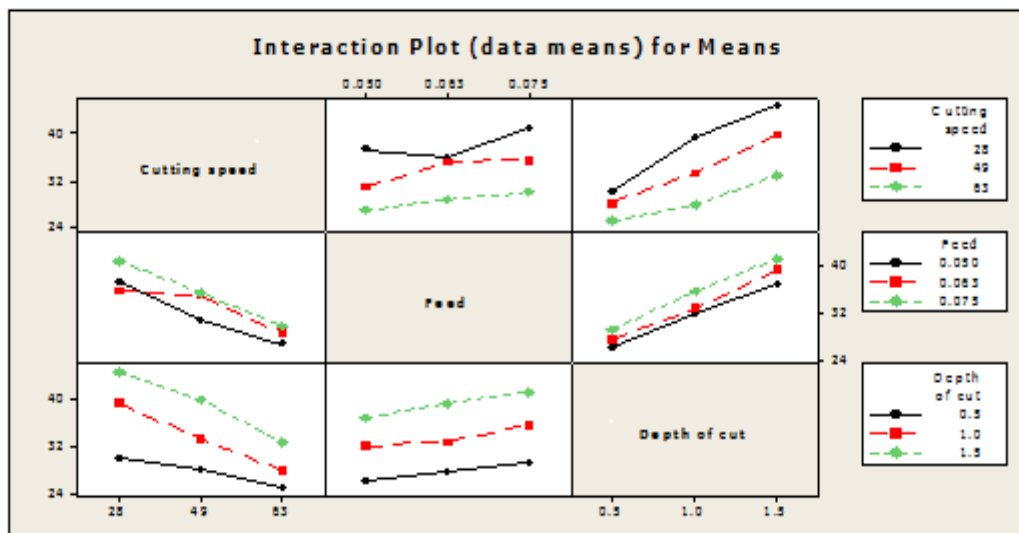


Fig 4: Interaction plot for means for cutting forces (smaller is better)

7.2 Effect on Tool Wear

The cutting speed, feed, depth of cut and environment have considerable effect on tool wear as shown in main effects plot for means of tool wear in Figure. Interaction plots for mean tool wear are shown in the Figure. Flank wear is the most important tool wear occurring in machining operation. The flank wear is primarily attributed to rubbing of the tool along the mechanical surfaces, causing abrasive, diffusive and adhesive wear mechanisms and also high temperature, which affect the tool material properties as well as the work piece surface. The main effect plots for means for tool wear (Figure) show that the tool wear increased frequently with the increase in depth of cut. This was due to high quantity of material removed, which had flown over the tool tip at higher depth of cut. The strength of the tool was also reduced because high cutting temperature was produced due to increase in the rate of plastic deformation. The tool wear increased with the increase in cutting speed because quick shearing took place at

higher cutting speed result higher cutting temperature. As a result the strength of the tool was reduced and flank wear increased rapidly. In case of gases application, the lowest tool wear was achieved by using Nitrogen gas as a cutting fluid as compared to dry turning.

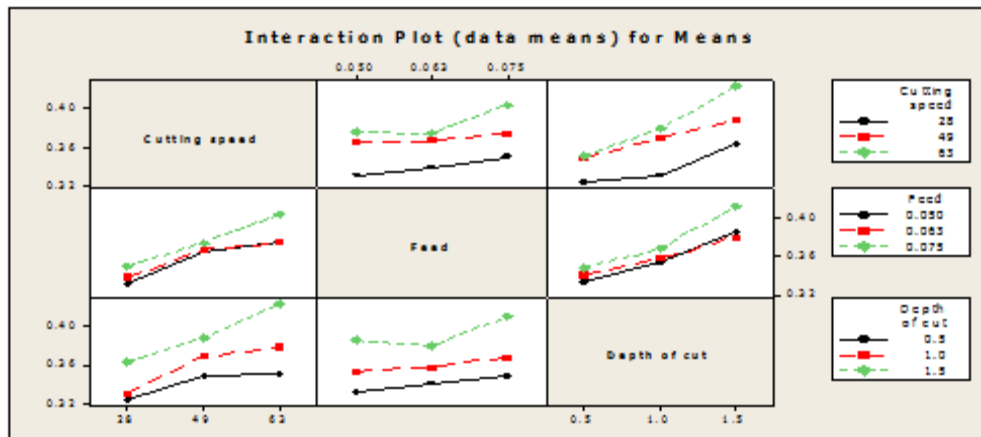


Fig 5: Interaction plot for means for tool wear (smaller is better)

This was due to more cooling and lubrication effect produced by the use of nitrogen gas which reduced the coefficient of friction at the interface of the tool and chip over the rake face. The cooling effect produced by the nitrogen gas appears to be more effective in reducing tool wear at comparatively higher cutting speed. It was probably due to the reason that at lower cutting speeds, the temperature of the tool tip may never be high enough compared to ambient temperature to cause the noticeable positive effect of the coolant. It is apparent that the cooling effect produced by gases neutralized the adverse effect of possible higher tool chip interface temperatures during machining. This reduction in the temperature thus helped in restricting flank wear of the cutting inserts. The tool wear for dry machining and nitrogen gas application were close. This was due to machining at atmospheric conditions and atmosphere contains more than 70% of nitrogen gas. Also, the cooling effect was increased by the flow of nitrogen gas in cutting zone and this would provide reduction in tool wear as compared to dry machining. The highest tool wear was observed in dry machining as compared with nitrogen environment in each machining parameter. The interaction plots (Figure) show the interaction between cutting speed and feed, cutting speed and depth of cut, feed and depth of cut.

8. CONCLUSIONS

In the present research work, an attempt has been made to study the effect of nitrogen and carbon dioxide gases on the performance of cryogenically Carbide insert in turning EN 9 steel. The results were compared with dry turning. The following conclusions are drawn.

Application of gases has reduced the tool wear and cutting force when compared with dry machining.

Depth of cut has the maximum influence under all machining conditions.

Cryogenically carbide tool performs better by using nitrogen gas as compared to dry turning environment.

The cutting forces increased with increase in depth of cut and feed and decreased as speed increased.

The flank wear increased with increase in depth of cut, cutting speed and feed

REFERENCES

- [1] A. Elango², Arunkarthikeyan. K. Sathishkumar,” A Comparative Study of the Effect of Various Cryogenic Treatments on the Performance of Tungsten Carbide Inserts,” IJRASET, 2016, Volume 4 Issue XII,.
- [2] Yong J., Ding C., “Effect of cryogenic treatment on WC-Co cemented carbides”, Material Science Engineering, 2011, Vol. 528, pp.1735-1739.
- [3] KalsiN.S., Sehgal R., Sharma V.S., “Cryogenic Treatment of Tool Materials: A Review”, Materials and Manufacturing Processes, 2010, Vol. 25, pp. 1077-1100.
- [4] RamjiB.R., “Analysis of forces ,roughness, wear and temperature in turning cast iron using cry treated carbide inserts”, International Journal of Engineering Science and Technology, 2010, Vol. 2(7), pp. 2521-2529.
- [5] Palanisamy S., McDonald S.D., Dargusch M.S., “effects of coolant pressure on chip formation while turning Ti6Al4V alloy”, International Journal of Machine Tools & Manufacture, 2009, Vol.49, pp.739-743.
- [6] Reddy T.V.S., Kumar S.T., Reddy M.V., Venkataram R., Kumar S.A., ,“A turning studies of deep cryogenic treated p-40 tungsten carbide cutting tool inserts”, technical communication, Journal of Manufacturing Science and Technology, 2009, Vol. 13, pp. 269-281.
- [7] Vadivel K., Rudramoorthy R., “Performance analysis of cryogenically treated coated carbide inserts”, International Journal of Advance Manufacturing Technology, 2009, Vol. 42(3), pp. 240-232.
- [8] Ying K., Dong H., Liu G., Zhang M., “Use of nitrogen gas in high-speed milling of Ti-6Al-4V”, Project supported by the national high-tech research and development program of China, References and further reading may be available for this article. To view references and further reading you must purchase this article International Journal of Machine Tools and Manufacture, 2009, Vol. 49, pp. 435-453.
- [9] Stanford M., Lister P.M., Morgan C., Kibble K.A., “Investigation into the use of gaseous and liquid nitrogen as a cutting fluid when turning BS 970-80A15 (En32b) plain carbon steel using WC-Co uncoated tooling”, Journal of Materials Processing Technology, 2008, Vol. 209, pp. 961-972.
- [10] Reddy T.V.S., Kumar A.B.S., Reddy M.V., Venkataram, R., “Machining performance of low temperature treated P-30 tungsten carbide cutting tool inserts”, Cryogenics, 2008, Vol. 48, pp. 458-461
- [11] Singh D., Rao P.V., “Performance improvement of hard turning with solid lubricants”, International Journal of Advance Manufacturing Technology, 2008, Vol. 38, pp. 529-535.
- [12] Han M., Li Y., Zhao W., “Experimental study on cutting temperature in high speed cutting of Ti6Al4V alloy”, Journal of Engineering for Industry, 2008, Vol. 2, pp. 17-23.
- [13] Venugopal K.A., Paul S., Chattopadhyay A.B., “Growth of tool wear in turning of Ti-6Al-4V alloy under cryogenic cooling”, Wear, 2007, Vol. 262, pp. 1071-1078.
- [14] Yong A.Y.L., Seah K.H.W., Rahman M., “Performance of cryogenically treated tungsten carbide tools in milling operations”, International Journal of Advance Manufacturing Technology, 2007, Vol. 32, pp. 638-643.
- [15] Liu J., Han R., Zhang L., Guo, H., “Study on lubricating characteristic and tool wear with water vapor as coolant and lubricant in green cutting”, Wear, 2007, Vol. 262, pp. 442-452.